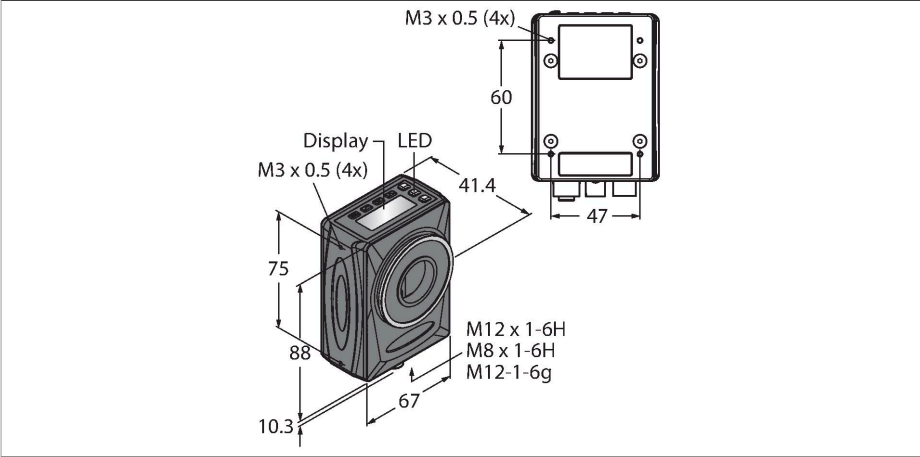


VE202G1B
Smart Camera



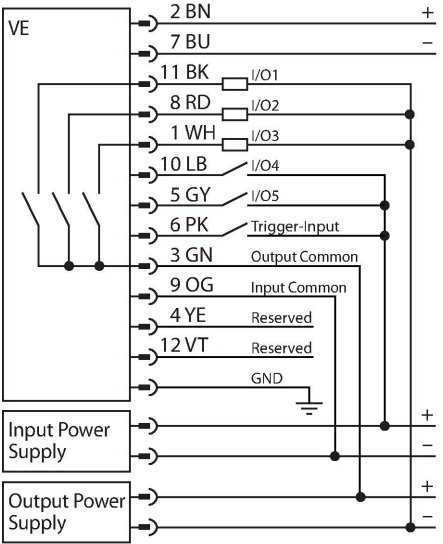
Technical data

Type	VE202G1B
ID	3810265
Camera data	
Function	Barcode reader - smart camera
Image sensor	1/1.8" CMOS, grayscale value
Resolution	1600 × 1200 pixels
Pixel size	4.5 μm
Frame rate	50 fps
Exposure time	0.02...500 ms
Internal memory	500 MB
Number of inspections	≤ 999
Lens	C-Mount
Electrical data	
Operating voltage U_b	12...30 VDC
DC rated operating current I_o	≤ 400 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Communication protocol	EtherNet/IP Modbus TCP PROFINET
Output function	Input/output programmable, 5 × PNP/ NPN optically decoupled
Power on display	LED, Green
Switching state	LED, Yellow
Error indication	LED, red
Mechanical data	
Design	Rectangular, VE
Dimensions	88 x 67 x 41.4 mm

Features

- Identification tools: automatic teach-in, maximum barcode count, 1D barcodes, 2D barcodes, postal barcodes, quality rating
- Analysis tools: mathematical operations and measuring function
- Vision manager software with intuitive user interface
- 1/1.8" CMOS, 2 MP image sensor
- 2-line, 8-segment LCD display with push-buttons
- 5 x PNP/NPN, input/output
- External trigger input
- Connection for external lighting
- Supports Ethernet protocol PROFINET, EtherNet/IP and Modbus/TCP)
- Protection class IP20, IP67 with lens cover (sold separately)
- C-mount lens (sold separately)

Wiring diagram



Technical data

Housing material	Aluminium, AL
Electrical connection	Connector, M12 × 1, 12-wire
Ambient temperature	0...+50 °C
Protection class	IP20 IP67
Tests/approvals	
Approvals	CE, cULus list

Functional principle

The VE smart camera has a 2-megapixel CMOS image sensor and combines the ease of use and configuration (similar to the iVu image sensor) with the powerful complexity and multifunctionality (similar to the PresensePlus P4) of an image processing system. The vision manager software is an intuitive user interface. It has a variety of editing options, great flexibility in the creation and editing of inspections, as well as the possibility to simulate inspections with an emulator in the course of an application analysis.

Accessories

SMBVEMP

3800293

Mounting panel

Technical drawing of the SMBVEMP mounting panel. The drawing shows a rectangular plate with dimensions 87.6 x 60.7 mm. It features 3x M8 x 1.25 threaded holes (10-32-2B) and 2x 1/4-20-2B threaded holes. The panel has a thickness of 3.3 mm and a mounting flange with a 7 mm thickness and 15 mm width. The mounting flange has a 3 mm width and 15 mm height. The mounting flange has a 3 mm width and 15 mm height. The mounting flange has a 3 mm width and 15 mm height.


SMBVERA

3097185




Bracket for mounting on right side

Technical drawing of the SMBVERA bracket. The drawing shows a U-shaped bracket with dimensions 73 x 60 mm. It has a mounting flange with a 2.8 mm thickness and 3.5 mm width. The bracket has a 7 mm diameter hole and a 25 mm diameter hole. The mounting flange has a 25 mm width and 27 mm height. The bracket has a thickness of 3.5 mm and a mounting flange with a 7 mm diameter hole.

Accessories

Dimension drawing	Type	ID	
	MQDC2S-1206	3011420	Power supply, M12 × 1 female connector, 12-pin, cable length: 1.83 m
	RKS12T-2/TXL	6626917	Connection cable, M12 female connector, straight, 12-pin, shielding on coupling nut; cable length: 2 m, jacket material: PUR, black; cULus approval
	RSS RJ45S 841-2M	U8626-2	Extension cable for Industrial Ethernet, M12 male connector to RJ45 male connector, 8-pin, cable length: 2 m, jacket material: TPE, green, shielded, stranded wires, twisted pair

Accessories

Dimension drawing	Type	ID	
	LCF12LEVMP	3097347	C-mount lens, 12 mm focal distance
	VELC60-PC	3097182	Lens cover, length: 60 mm, Window material: Polycarbonate
Kein Maßbild vorhanden/ No dimension drawing available	FLTR635-27	3097530	Bandpass filter red, 27 mm diameter suitable for LCFxxLEVMP lenses
	LEDRRV70XD5-PM	3097364	High-intensity LED ring light, adjustable via potentiometer, for installation and control on a VE smart camera, light color: red
	LEDRRV62X62M	3097378	LED ring light for installation and control on a VE smart camera, light color: red